

BENY
EV Charger

WWW.BENY.COM

ZHEJIANG BENYI NEW ENERGY CO.,LTD.
WENZHOU BRIDGE INDUSTRIAL ZONE, BEIBAIXIANG TOWN, ZHEJIANG, CHINA
TEL: +86-577-5717 7008 FAX: +86-577-5717 7007
VERSION: 20230828
✉ benyi@zjbeny.com
🌐 www.beny.com

♻ This catalogue has been printed on ecological paper.
© Zhejiang Benyi New Energy Co.,Ltd.all rights reserved.
⚠ If the models and specification in this product catalogue is changed due to the change of products, we will not inform.



Company Introduction

BENY new energy offers a reliable and robust electric fast charger with an attractive design that is easy to own and operate, with high quality power electronic components. It is a powerful charging station that can deliver up to 262 kW, with CCS1/CCS2/CHAdeMO/AC charging outlets.

We are a leading brand in annually producing hundreds of thousands of quality DC protection products and EV charging stations for complete and reliable solar photovoltaic, battery energy storage, and EV charging system. Certified by UL, SAA, CB, CE, TUV, UKCA, ISO, and RoHS, we have the first listed patented DC switch and produce creative solutions like the AFCI solution for rooftop fire protection, dynamic load balancing, and PEN fault detection EV charger.

100+
R&D Engineer

100+
Possess an invention patent

Certification
Has been granted by several countries

40+
National and regional customer recognition

We are Working on a Sustainable Future.




30+
Years of Experience

20+
Million Annual Production Capacity

EV Chargers
Application by Market Segments





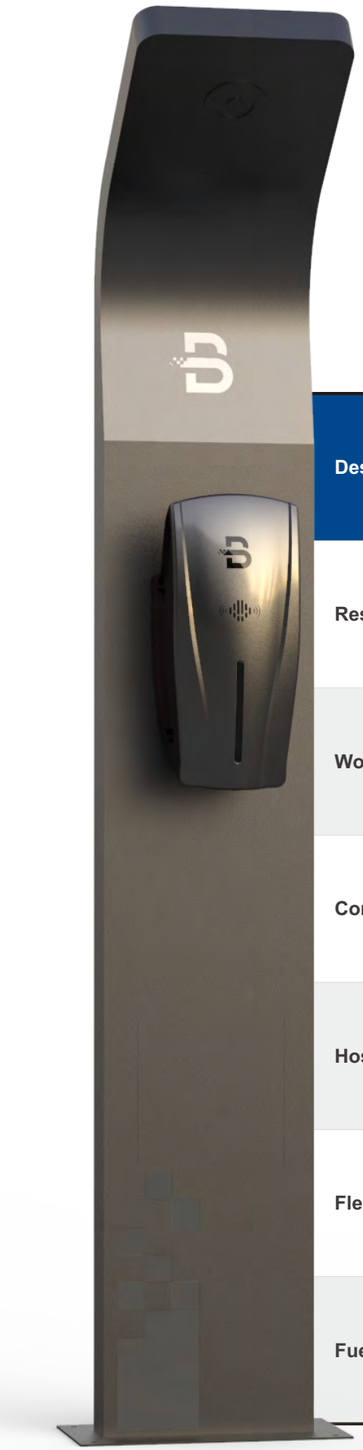


Charger Application

Destination	Portable EV Charger	T2S Socket EV Charger	EV Charger	Dual Socket EV Charger	Wall-mounted DC EV Charging Station	Stand Column 1 Guns DC EV Charging Station	Stand Column 2 Guns DC EV Charging Station	Stand Column 3 Guns DC EV Charging Station
Residential	✓	✓	✓	✓				
Workplace		✓	✓	✓	✓			
Commercial Parking		✓	✓	✓	✓	✓	✓	✓
Hospitality		✓	✓	✓	✓	✓	✓	✓
Fleet					✓	✓	✓	✓
Fuel Retailer					✓	✓	✓	✓

Contents

BENY comprises a set of products and solutions designed to facilitate Electric Vehicle (EV) charging.We aim to provide user-friendly solutions for electric vehicle charging in different scenarios, such as urban streets, intercity roads and public or private car parks, for multiple or single users.Our product portfolio offers a wide product range that covers slow charging (AC) and fast charging (DC). BENY is with a presence in 60 countries.

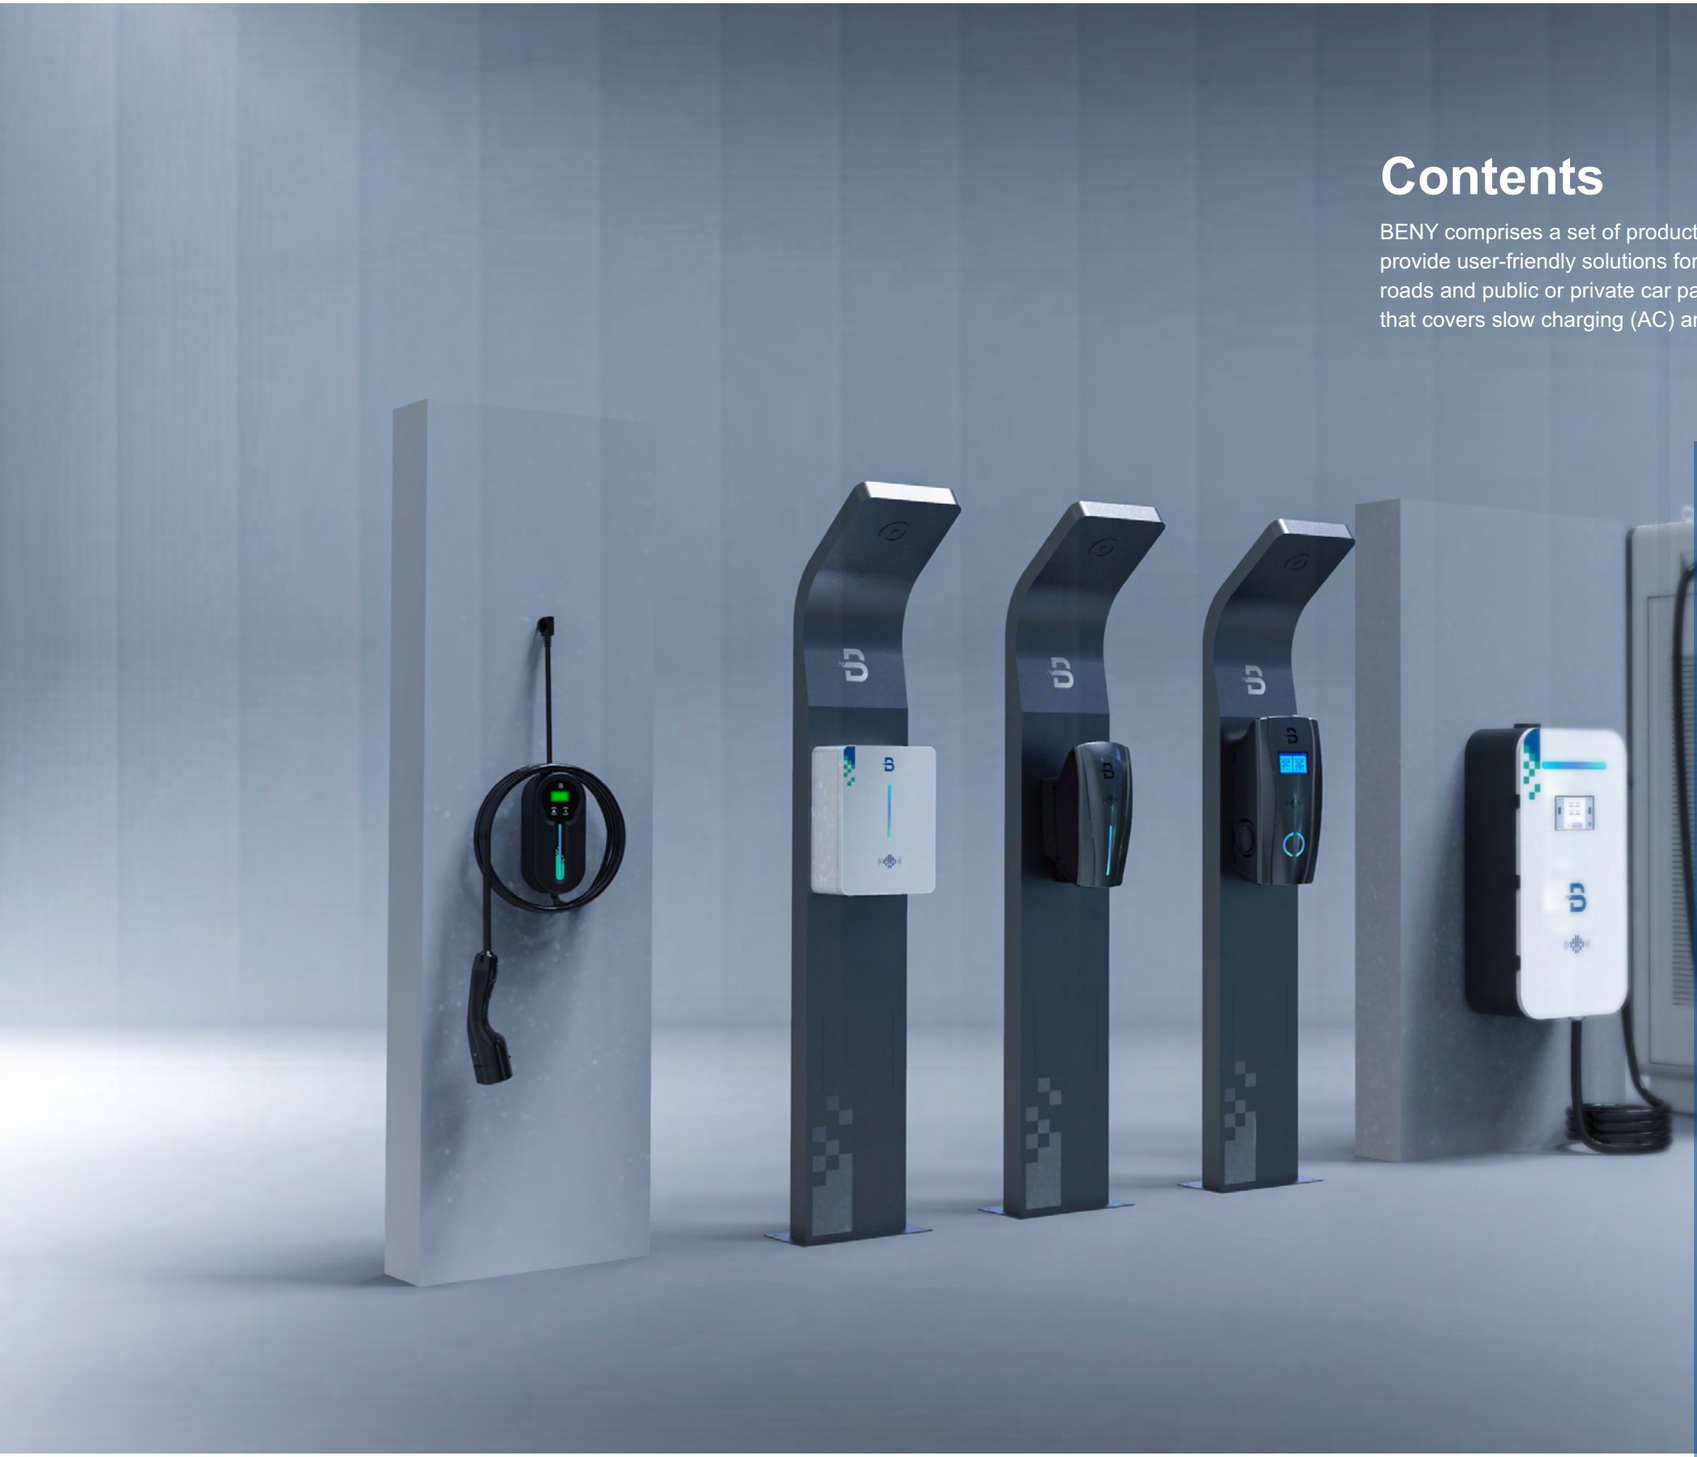

AC EV Charger 01

Portable EV Charger 01
Portable EV Charger 05
Smart Home Charger 09
Dual Socket EV Charger 23
Dual Socket EV Charger 28
EV Charger for Smart Home and Commercial 30

DC EV Charger 40

Wall-mounted DC EV Charger 40
1 Gun DC EV Charging Station 43
2 Guns DC EV Charging Station 50
3 Guns DC EV Charging Station 62

BENY OCPP Platform Overview 67



Portable EV Charger

3.7KW-22KW



Product Introduction

The charger is designed according to IEC 62752, IEC 61851-21-2 standard, mainly consists of control box, charging connector, plug and etc... which is a portable electric vehicle charging device. It enables car owners to charge electric vehicles anywhere using a standard home power interface, featuring high efficiency and portability.

Protection Functions

- Over Current Protection
- Fire Protection
- Anti-pressure Protection
- Ground Protection
- Leakage Protection
- Over Temperature Protection
- Over Voltage Protection
- Relay Adhesion Protection
- CP Signal Abnormal Protection
- Under Voltage Protection
- Lightning Protection

With full protection to avoid all kinds of charging safety hazards, it will automatically power off after the vehicle is fully charged, to protect the car battery and prolong the working life.

Portable
EV Charger



Model Selection

Models	BCPP-A1-16
	European standard
Maximun Power	3.7kw
Input/Output Voltage	AC230 1-Phase
Charging Current Range	8A-16A
Frequency	50HZ/60HZ
Display	OLED Screen + LED Light
DLB	✗
Wall-mounted	✗
Adjustable Current	✓
Timed Charging	✓
Plug options	✓
Weekly Reservation Charging	✗
History Charging Records	✗
Bluetooth	✗
WIFI	✗
APP	✗
CP Signal Abnormal Protection	✓
Over Voltage Protection	✓
Under Voltage Protection	✓
Over Current Protection	✓
Leakage Protection	✓
Over Temperature Protection	✓
Relay Adhesion Protection	✓
Lightning Protection	✓
Fire Protection	✓

✓ : Standard ○ : Optional ✗ : Without

Anti-pressure Protection	✓
Ground Protection	✓
Working Life	<10000 times
Plug Cable Length	1m
Total Length	7m as standard (Customized length available)
IP Protection	IP66
Operating Temperature	-30℃ ~ +50℃
Storage temperature	-40℃-85℃
Operating Altitude	<2000m

Plug Types

	EU(German)	AU	ZA	UK	BRA
					
Model Type	ZH-3	YP-39A	ZH-70A	YP-61A	ZH-72B
Current/Voltage	16A/250V~	20A/250V~	16A/250V~	13A/250V~	16A/250V~
Wire	H07BZ5-F 3G 2.5mm²	H05VV-F 3G 2.5mm²	H07RN-F 3G 2.5mm²	H05VV-F 3G 2.5mm²	H07RN-F 3G 2.5mm²
Material	P.V.C	P.V.C	P.V.C	P.V.C	P.V.C



Portable EV Charger

MAX:22KW



Portable EV Charger

Product Introduction

The charger is designed according to IEC 62752, IEC 61851-21-2 standard, mainly consists of control box, charging connector, plug and etc... which is a portable electric vehicle charging device. It enables car owners to charge electric vehicles anywhere using a standard home power interface, featuring high efficiency and portability.

Protection Functions

- Over Current Protection
- Fire Protection
- Anti-pressure Protection
- Ground Protection
- Leakage Protection
- Over Temperature Protection
- Over Voltage Protection
- Relay Adhesion Protection
- CP Signal Abnormal Protection
- Under Voltage Protection
- Lightning Protection

With full protection to avoid all kinds of charging safety hazards, it will automatically power off after the vehicle is fully charged, to protect the car battery and prolong the working life.

Portable
EV Charger





Model Selection

Models	BCPP-A2N-32	BCPP-AT2N-32
	European standard	
Maximun Power	7.4kw	22kw
Input/Output Voltage	AC230 1-Phase	AC400 3-Phase
Charging Current Range	6A-32A	6A-32A
Frequency	50HZ/60HZ	
Display	Five-inch touch screen + LED Light	
DLB	○	○
Wall-mounted	✓	✓
Adjustable Current	✓	✓
Timed Charging	✓	✓
Plug options	✓	✓
Weekly Reservation Charging	✓	✓
History Charging Records	✓	✓
Bluetooth	✓	✓
WIFI	✓	✓
APP	✓	✓
CP Signal Abnormal Protection	✓	✓
Over Voltage Protection	✓	✓
Under Voltage Protection	✓	✓
Over Current Protection	✓	✓
Leakage Protection	✓	✓
Over Temperature Protection	✓	✓
Relay Adhesion Protection	✓	✓
Lightning Protection	✓	✓
Fire Protection	✓	✓
Anti-pressure Protection	✓	✓
Ground Protection	✓	✓
Working Life	<10000 times	
Plug Cable Length	30CM	
Total Length	7m as standard (Customized length available)	
IP Protection	IP65	
Operating Temperature	-30℃ ~ +50℃	
Storage temperature	-40℃-85℃	
Operating Altitude	<2000m	

✓ : Standard ○ : Optional ✗ : Without

Plug Types

	EU(German)	AU	ZA	UK	BRA
					
Model Type	ZH-3	YP-39A	ZH-70A	YP-61A	ZH-72B
Current/Voltage	16A/250V~	20A/250V~	16A/250V~	13A/250V~	16A/250V~
Wire	H07BZ5-F 3G 2.5mm²	H05VV-F 3G 2.5mm²	H07RN-F 3G 2.5mm²	H05VV-F 3G 2.5mm²	H07RN-F 3G 2.5mm²
Material	P.V.C	P.V.C	P.V.C	P.V.C	P.V.C

				
Model Type	EV-32SN	EV-32N	EV-16SN	EV-16N
Current/Voltage	32A/230V (3 Phase)	32A/230V (1 Phase)	16A/230V (3 Phase)	16A/230V (1 Phase)
Wire	H07BZ5-F 5G6mm² +2*0.5mm²	H07BZ5-F 5G6mm² +2*0.5mm²	H07BZ5-F 5G6mm² +2*0.5mm²	H07BZ5-F 5G6mm² +2*0.5mm²
Material	N.P C-35P N.P C-55P	N.P C-35P N.P C-55P	N.P C-45P	N.P C-45P

Smart Home Charger

7.4kW to 22kW

1 connector

Protection Functions

- Charging protocol OCPP1.6-J
- BCP Series EV chargers have an IP65 patented designcase for outdoor and indoor use.
- The type 2 socket with shutter in acccordance with IEC 62196-2,makes highly flexible and compatible with all electric vehicles.
- Plug and start to charge automatic. (RFID card for option)
- The EV charger output power can be adjusted from 6A all the way up to 32A.



Smart Home Charger




EV Charger Model

B	CP	AT	1	N	L	16
Company	Application	Categories	Classification	Classification	Reserved	Max Current
B: BENY Electric	CP: Home Charging	A: 1-Phase Tethered B: 1-Phase Socket AT: 3-Phase Tethered BT: 3-Phase Socket	1: Autostart 2: With RFID	None: Without The Following Functions D: With DLB Function N: Smart Version with DLB Function	Reserved	Blank: 32A 16: 16A


Single Phase Model (PEN Function Is Only For UKCA Certificate)

B	CP	A	1	D	L	E	16
Company	Application	Categories	Classification	Classification	Reserved	PEN	Max Current
B: BENY Electric	CP: Home Charging	A: 1-Phase Tethered B: 1-Phase Socket AT: 3-Phase Tethered BT: 3-Phase Socket	1: Autostart 2: With RFID	None: Without The Following Functions D: With DLB Function N: Smart Version with DLB Function	Reserved	E: PEN Fault Protection Blank: Without PEN Fault Protection	Blank: 32A 16: 16A

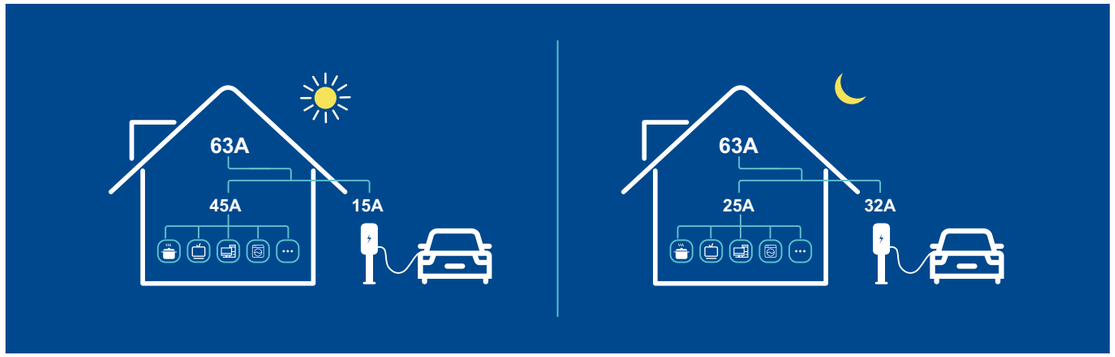

Dynamic Load Balancing

DLB (Dynamic Load Balancing) is available in the BCPM series AC EV Charger for home use, when the EV charger is working with other household appliances at the same time, the DLB box can maintain the dynamic balance of the total household current and ensure the safety of electricity to avoid home over load.
Set the Max current value of the main line on the DLB box. The charger will read this current value and automatically adjust the charging current (6A-32A) according to the idle load quota, so that the total household current will not be overloaded due to charging. This function can effectively use the power supply without providing additional power for the charging or home line update.

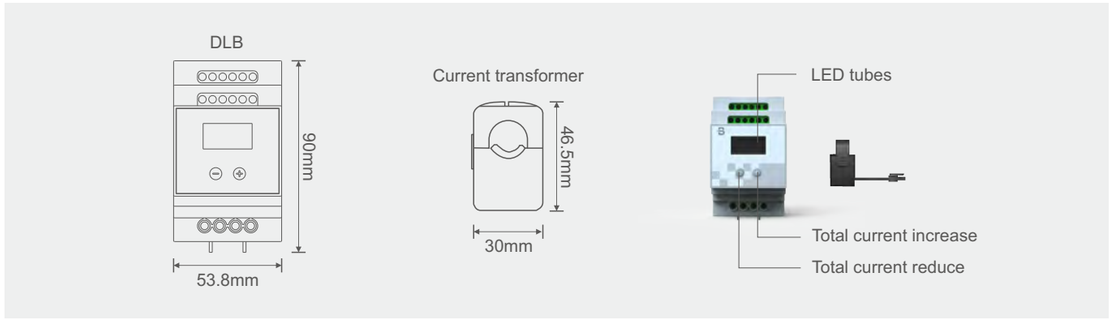

Main problems

EV drivers want to charge their vehicles faster, especially in public and semi-public spaces, while charging service
providers want to reduce their costs. The constant growth in EV charging creates new challenges:
- **How to avoid overloading the grid and causing power cuts.**
- **How to minimise the investment required to upgrade installations.**
- **How to set up an EV charging system capable of simultaneous charging.**

This situation requires an intelligent system to manage the charge and this is where DLB (Dynamic Load Balancing) comes in.

© 2023 BENY NEW ENERGY

Smart Home Charger



Smart APP



The EV charger can be controlled by smart APP via WIFI or bluetooth connection.

One to one binding EV charger by reset the password, prevent the EV charger being stolen.

View charging data and status.

Set up various charging configurations, charging current,DLB mode,etc.


Scheduled charging.

Firmware update.

View historical charging records.

Setting monthly maximum charging values.

Contactor Adhesion Protection

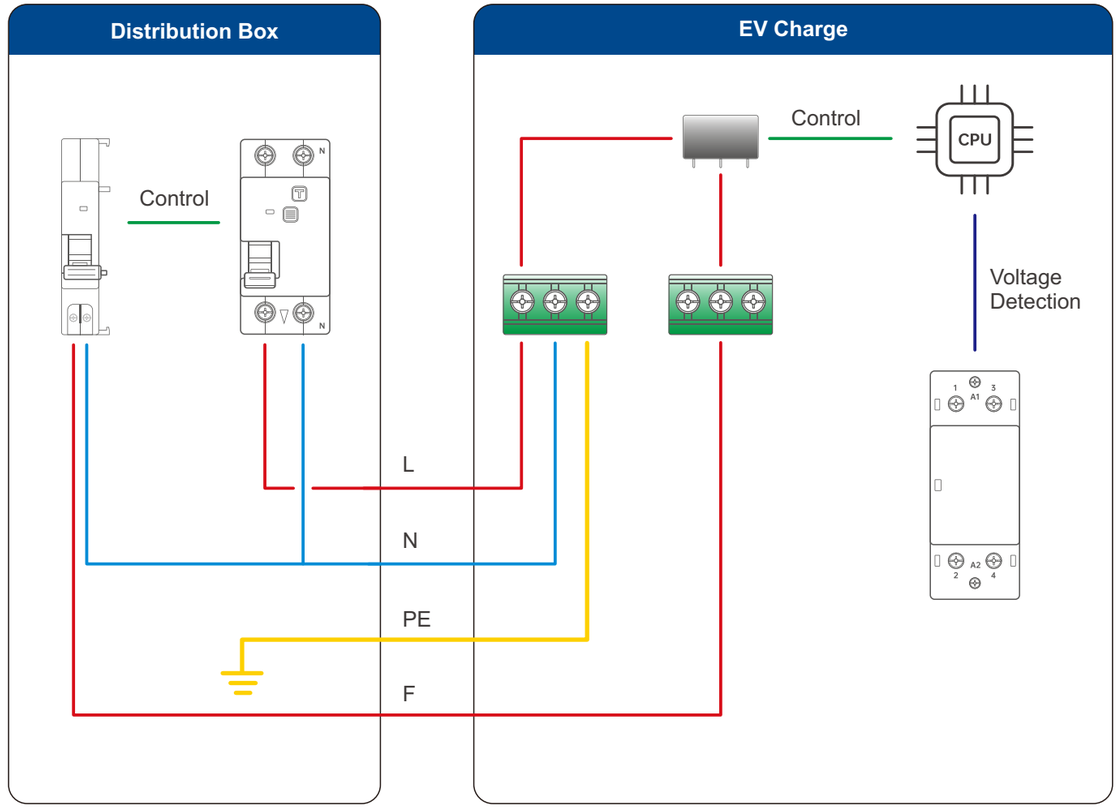

- Single-Phase



- Three-Phase



About contactor adhesion protection and why?

When the contactor in the charger is stuck due to current or short-circuit failure, the charger gun or the wires in the socket type charger will be live, brings the danger of electric shock to people.
The charger with contactoer adhesion protection can avoid the danger.

How contactor adhesion protection works?

The main control chip of the charger keeps detecting the voltage of the contactor output;
If there is an AC voltage is detected at the output of the contactor when the charger is not in operating.
Then the charger will run the fault protection routine to alarm the lights and control the on-board relay to close.
As shown in the figure, the trip unit will drive the leakage protector to trigger and disconnect the power supply.

Smart Home Charger



Electrical

Charging Capacity	1.3kW – 7.4kW / 4.1kW – 22kW
Charge Mode	Mode 3 (IEC 61851-1)
Output Power	Selectable 1-phase or 3-phase, 230-400V 6A -32A, 50-60Hz
Socket Type	Type 2 Socket

Protection and certification

Build-in RCD	DC6mA leakage sensor built-in
Socket	IP65, IK10
Housing Fire Ratings	V0
Operating Temperature	-25~+50℃
Compliance	IEC61851-1,IEC61851-21-2,IEC61000-4 CE EMC EU/2014.CE Low Voltage EU/2014/35
Certificate	CE, UKCA, CB, RCM

Commectivity

Authorization	Auto-start standard / RFID card option
Status Indication	LED ring
WLAN Communication	Wi-Fi / Bluetooth 4.2 option
Charging Protocol	OCPP1.6-J

Mechanical

Housing	Plastic
Dimension	W278 x H360 x D152 mm
Mounting	Wall or Pole

WIFI

Operating Frequency Range	2412 - 2484MHz
WI-FI Protocols	IEEE 802.11 b/g/n
Channels	13
TX Power	<20dbm
EIRP	0.459
TX bandwidth	20MHz/40MHz
Modulation type	OFDM & DSSS
Transmitting Duty Cycle	10%

BlueTooth BLE

Sensitivity @30.8% PER	-93 dbm
Co-channel C/I	+10db
RF Power Control Range	-12 ~ 9dbm

NFC

Modulation Type	ASK
Operating Frequency	13.56MHz
H-field strength	21.31 dBuA/m@3m distance
Antenna Type	Coil Antenna

Smart Home Charger



1-Phase Un-smart Version

Wallbox Models	BCP-A1D-L	BCP-A2D-L	BCP-B1D-L	BCP-B2D-L
				
Categorization	Un-smart Version			
Maximum Power	7.4kW			
Input Voltage /Output voltage	AC230 1-Phase			
Input Frequency	50/60Hz			
Meter	Metering Chip			
Display	LED Lights			
RFID	✗	✓	✗	✓
DLB	○	○	○	○
Wi-Fi	✗	✗	✗	✗
APP	✗	✗	✗	✗
Bluetooth	✗	✗	✗	✗
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP65	IP65	IP55	IP55
Environment Temperature	-25℃~+55℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional ✗ : Without

1-Phase Smart Version

Wallbox Models	BCP-A1N-L	BCP-A2N-L	BCP-B1N-L	BCP-B2N-L
				
Categorization	Smart Version			
Maximum Power	7.4kW			
Input Voltage /Output voltage	AC230 1-Phase			
Input Frequency	50/60Hz			
Meter	Metering Chip			
Display	LED Lights			
RFID	✗	✓	✗	✓
DLB	○	○	○	○
Wi-Fi	✓	✓	✓	✓
APP	✓	✓	✓	✓
Bluetooth	✓	✓	✓	✓
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP65	IP65	IP55	IP55
Environment Temperature	-25℃~+55℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional ✗ : Without

Smart Home Charger



3-Phase Smart Version

Wallbox Models	BCP-AT1N-L	BCP-AT2N-L	BCP-BT1N-L	BCP-BT2N-L
				
Categorization	Smart Version			
Maximum Power	22kW			
Input Voltage /Output voltage	AC400 3-Phase			
Input Frequency	50/60Hz			
Meter	Metering Chip			
Display	LED Lights			
RFID	✗	✓	✗	✓
DLB	○	○	○	○
Wi-Fi	✓	✓	✓	✓
APP	✓	✓	✓	✓
Bluetooth	✓	✓	✓	✓
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP65	IP65	IP55	IP55
Environment Temperature	-25℃~+55℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional ✗ : Without

1-Phase Un-smart Version

Wallbox Models	BCP-A1D-L-E	BCP-A2D-L-E	BCP-B1D-L-E	BCP-B2D-L-E
				
Categorization	Un-smart Version			
Maximum Power	7.4kW			
Input Voltage /Output voltage	AC230 1-Phase			
Input Frequency	50/60Hz			
Meter	Metering Chip			
Display	LED Lights			
RFID	✗	✓	✗	✓
DLB	○	○	○	○
Wi-Fi	✗	✗	✗	✗
PEN	✓	✓	✓	✓
APP	✗	✗	✗	✗
Bluetooth	✗	✗	✗	✗
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP65	IP65	IP55	IP55
Environment Temperature	-25℃~+55℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional ✗ : Without

© 2023 BENY NEW ENERGY

Smart Home Charger



1-Phase Smart Version

Wallbox Models	BCP-A1N-L-E	BCP-A2N-L-E	BCP-B1N-L-E	BCP-B2N-L-E
				
Categorization	Smart Version			
Maximum Power	7.4kW			
Input Voltage /Output voltage	AC230 1-Phase			
Input Frequency	50/60Hz			
Meter	Metering Chip			
Display	LED Lights			
RFID	✗	✓	✗	✓
DLB	○	○	○	○
Wi-Fi	✓	✓	✓	✓
PEN	✓	✓	✓	✓
APP	✓	✓	✓	✓
Bluetooth	✓	✓	✓	✓
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP65	IP65	IP55	IP55
Environment Temperature	-25℃~+55℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional ✗ : Without

OCPP Version

Wallbox Models	BCP-A2N-P	BCP-B2N-P	BCP-AT2N-P	BCP-BT2N-P
				
Categorization	7.4kW		22kW	
Maximum Power	AC230 1-Phase		AC400 3-Phase	
Input Voltage /Output voltage	50/60Hz			
Input Frequency	Tethered	Socket	Tethered	Socket
Meter	Metering Chip			
Display	LED Lights			
RFID	✓	✓	✓	✓
DLB	○	○	○	○
Wi-Fi	✓	✓	✓	✓
Ethernet	✓	✓	✓	✓
Bluetooth	✓	✓	✓	✓
4G	○	○	○	○
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP65	IP55	IP65	IP55
Environment Temperature	-25℃~+55℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional




OCPP Version

Wallbox Models	BCPC-B2N-P	BCPC-BT2N-P	BCPC-D2N-P	BCPC-DT2N-P
				
Maximum Power	7.4kW	22kW	2x7.4kW	2x22kW
Input Voltage /Output voltage	AC230 1-Phase	AC400 3-Phase	AC230 1-Phase	AC400 3-Phase
Input Frequency	50/60Hz			
Tethered/Socket	Socket			
Meter	MID Meter		2xMID Meter	
Display	LCD Screen+LED Lights			
RFID	●	●	●	●
DLB	○	○	○	○
Wi-Fi	●	●	●	●
Ethernet	●	●	●	●
Bluetooth	●	●	●	●
4G	○	○	○	○
Over Voltage &Under Voltage Protection	●	●	●	●
Emergency Stop	●	●	●	●
Over Current Protection	●	●	●	●
CP Signal Short Circuit Protection	●	●	●	●
Over Temperature Protection	●	●	●	●
Lightning Protection	●	●	●	●
Contactor Adhesion Protection	●	●	●	●
Protection Degree	IP55	IP55	IP55	IP55
Environment Temperature	-25℃~+50℃			
Maximun Altitude	< 2000m			

● : Standard ○ : Optional

Dual Socket EV Charger

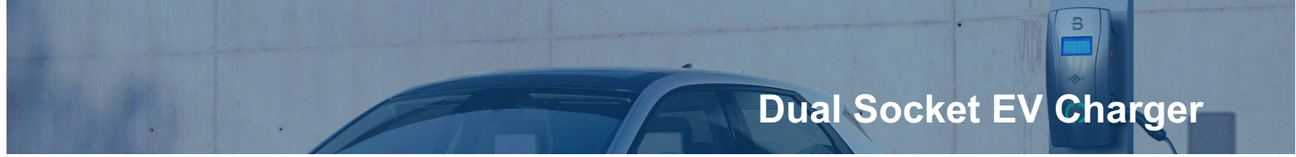

OCPP Specification

Version	OCPP1.6-J
TLS	support
HTTP Basic Authentication	support
Feature Profiles	Core、Firmware Management、Local Auth List Management、Remote Trigger、Reservation、Smart Charging
Get Diagnostics Protocol	FTP
Update Firmware Protocol	HTTP

Security Profile

Level	Details	Yes or No
Security Profile 0	Regular OCPP 1.6J without security	√
Security Profile 1	OCPP 1.6J with Basic Authentication	√
Security Profile 2	OCPP 1.6J with TLS (Only Server-side certificate) and Basic Authentication	√
Security Profile 3	OCPP 1.6J with TLS using Server and client-side certificates	X

OCPP Configurations

Name	Support	(R)/ (RW)
Allow Offline Tx For UnknownId	YES	RW
Authorization Cache Enabled	YES	RW
Authorize Remote Tx Requests	YES	RW
Blink Repeat	NO	RW
Clock Aligned DataInterval	YES	RW
Connection Time Out	YES	RW
Connector Phase Rotation	YES	RW
Connector Phase Rotation MaxLength	YES	R
Get Configuration MaxKeys	YES	R
Heartbeat Interval	YES	RW
Light Intensity	NO	RW
Local Authorize Offline	YES	RW
Local Pre Authorize	YES	RW
Max Energy OnInvalidId	NO	RW
Meter Values Aligned Data	YES	RW
Meter Values Aligned Data Max Length	YES	R
Meter Values Sampled Data	YES	RW
Meter Values Sampled Data Max Length	YES	R
Meter Value Sample Interval	YES	RW
Minimum Status Duration	YES	RW
Number Of Connectors	YES	R
Reset Retries	YES	RW
Stop Transaction On EVSide Disconnect	YES	RW
Stop Transaction OnInvalidId	YES	RW
Stop Txn Aligned Data	NO	RW
Stop Txn Aligned Data Max Length	NO	R
Stop Txn Sampled Data	NO	RW
Stop Txn Sampled Data Max Length	NO	R
Supported Feature Profiles	YES	R
Supported Feature Profiles Max Length	YES	R
Transaction Message Attempts	YES	RW
Transaction Message Retry Interval	YES	RW
Unlock Connector On EVSide Disconnect	YES	RW
Web Socket Ping Interval	YES	RW
Local Auth List Enabled	YES	RW
Local Auth List Max Length	YES	R
Send Local List Max Length	YES	R

Dual Socket EV Charger

Reserve Connector Zero Supported	YES	R
Charge Profile Max Stack Level	YES	R
Charging Schedule Allowed Charging RateUnit	YES	R
Charging Schedule Max Periods	YES	R
Connector Switch 3 to 1 Phase Supported	YES	R
Max Charging Profiles Installed	YES	R



© 2023 BENY NEW ENERGY

Wall-mounted and Portable EV Charger

OCPP Version

Wallbox Models	BCPV-B2N-P	BCPV-BT2N-P	BCPV-D2N-P	BCPV-DT2N-P
				
Maximum Power	7.4kW	22kW	2x7.4kW	2x22kW
Input Voltage /Output voltage	AC230 1-Phase	AC400 3-Phase	AC230 1-Phase	AC400 3-Phase
Input Frequency	50/60Hz			
Tethered/Socket	Socket			
Meter	MID Meter		2xMID Meter	
Display	LCD Screen+LED Lights			
RFID	✓	✓	✓	✓
DLB	○	○	○	○
Wi-Fi	✓	✓	✓	✓
Ethernet	✓	✓	✓	✓
Bluetooth	✓	✓	✓	✓
4G	○	○	○	○
Over Voltage &Under Voltage Protection	✓	✓	✓	✓
Emergency Stop	✓	✓	✓	✓
Over Current Protection	✓	✓	✓	✓
CP Signal Short Circuit Protection	✓	✓	✓	✓
Over Temperature Protection	✓	✓	✓	✓
Lightning Protection	✓	✓	✓	✓
Contactor Adhesion Protection	✓	✓	✓	✓
Protection Degree	IP55	IP55	IP55	IP55
Environment Temperature	-25℃~+50℃			
Maximun Altitude	< 2000m			

✓ : Standard ○ : Optional



© 2023 BENY NEW ENERGY

EV Charger for Smart Home and Commercial



Protection Functions

Charging protocol
OCPP1.6-J

BCPM Series EV chargers have an IP65 patented designcase for outdoor and indoor use.

The type 2 socket with shutter in acccordance with IEC 62196-2,makes highly flexible and compatible with all electric vehicles.

Plug and start to charge automatic.
(RFID card for option)

The EV charger output power can be adjusted from 6A all the way up to 32A.



EV Charger Model

B	CPM	AT	1	N	L	16
Company	Application	Categories	Classification	Classification	Reserved	Max Current
B: BENY Electric	CPM: Home Charging	A: 1-Phase Tethered B: 1-Phase Socket AT: 3-Phase Tethered BT: 3-Phase Socket	1: Autostart 2: With RFID	None: Without The Following Functions D: With DLB Function N: Smart Version with DLB Function	Reserved	Blank: 32A 16: 16A

RFID(Radio Frequency Identification Card)

RFID card reader enabled to start up charging function while approaching the swipe area.



© 2023 BENY NEW ENERGY

EV Charger for Smart Home and Commercial



Smart APP



The EV charger can be controlled by smart APP via WIFI or bluetooth connection.

One to one binding EV charger by reset the password, prevent the EV charger being stolen.

View charging data and status.

Set up various charging configurations, charging current,DLB mode,etc.

Scheduled charging.

Firmware update.

View historical charging records.

Setting monthly maximum charging values.

Electrical

Charging Capacity	1.3kW – 7.4kW / 4.1kW – 22kW
Charge Mode	Mode 3 (IEC 61851-1)
Output Power	Selectable 1-phase or 3-phase, 230-400V 6A -32A, 50-60Hz
Socket Type	Type 2 Socket with Shutter

Protection and certification

Build-in RCD	DC6mA leakage sensor built-in
Socket	IP65, IK10
Housing Fire Ratings	V0
Operating Temperature	-25~+50℃
Compliance	IEC61851-1,IEC61851-21-2,IEC61000-4 CE EMC EU/2014.CE Low Voltage EU/2014/35
Certificate	CE

Commectivity

Authorization	Auto-start standard / RFID card option
Status Indication	LED ring
WLAN Communication	Wi-Fi / Bluetooth 4.2 option
Charging Protocol	OCPP1.6-J

Mechanical

Housing	Metal
Dimension	W278 x H360 x D152 mm
Mounting	Wall or Pole

© 2023 BENY NEW ENERGY

EV Charger for Smart Home and Commercial



WIFI

Operating Frequency Range	2412 - 2484MHz
WI-FI Protocols	IEEE 802.11 b/g/n
Channels	13
TX Power	<20dbm
EIRP	0.459
TX bandwidth	20MHz/40MHz
Modulation type	OFDM & DSSS
Transmitting Duty Cycle	10%

BlueTooth BLE

Sensitivity @30.8% PER	-93 dbm
Co-channel C/I	+10db
RF Power Control Range	-12 ~ 9dbm

NFC

Modulation Type	ASK
Operating Frequency	13.56MHz
H-field strength	21.31 dBuA/m@3m distance
Antenna Type	Coil Antenna

1-Phase Un-smart Version

Wallbox Models	BCPM-B1D-L	BCPM-B2D-L
		
Categorization	Un-smart Version	
Maximum Power	7.4kW	
Input Voltage /Output voltage	AC230 1-Phase	
Input Frequency	50/60Hz	
Meter	Metering Chip	
Display	LED Lights	
RFID	✗	✓
DLB	○	○
Wi-Fi	✗	✗
APP	✗	✗
Bluetooth	✗	✗
Over Voltage &Under Voltage Protection	✓	✓
Emergency Stop	✓	✓
Over Current Protection	✓	✓
CP Signal Short Circuit Protection	✓	✓
Over Temperature Protection	✓	✓
Lightning Protection	✓	✓
Contactor Adhesion Protection	✓	✓
Protection Degree	IP65	
Environment Temperature	-25℃~+50℃	
Maximun Altitude	< 2000m	

✓ : Standard ○ : Optional ✗ : Without

© 2023 BENY NEW ENERGY

EV Charger for Smart Home and Commercial



1-Phase Smart Version

Wallbox Models	BCPM-B1N-L	BCPM-B2N-L
		
Categorization	Smart Version	
Maximum Power	7.4kW	
Input Voltage /Output voltage	AC230 1-Phase	
Input Frequency	50/60Hz	
Meter	Metering Chip	
Display	LED Lights	
RFID	✗	✓
DLB	○	○
Wi-Fi	✓	✓
APP	✓	✓
Bluetooth	✓	✓
Over Voltage &Under Voltage Protection	✓	✓
Emergency Stop	✓	✓
Over Current Protection	✓	✓
CP Signal Short Circuit Protection	✓	✓
Over Temperature Protection	✓	✓
Lightning Protection	✓	✓
Contactor Adhesion Protection	✓	✓
Protection Degree	IP65	
Environment Temperature	-25℃~+50℃	
Maximun Altitude	< 2000m	

✓ : Standard ○ : Optional ✗ : Without

3-Phase Smart Version

Wallbox Models	BCPM-BT1N-L	BCPM-BT2N-L
		
Categorization	Smart Version	
Maximum Power	22kW	
Input Voltage /Output voltage	AC400 3-Phase	
Input Frequency	50/60Hz	
Meter	Metering Chip	
Display	LED Lights	
RFID	✗	✓
DLB	○	○
Wi-Fi	✓	✓
APP	✓	✓
Bluetooth	✓	✓
Over Voltage &Under Voltage Protection	✓	✓
Emergency Stop	✓	✓
Over Current Protection	✓	✓
CP Signal Short Circuit Protection	✓	✓
Over Temperature Protection	✓	✓
Lightning Protection	✓	✓
Contactor Adhesion Protection	✓	✓
Protection Degree	IP65	
Environment Temperature	-25℃~+50℃	
Maximun Altitude	< 2000m	

✓ : Standard ○ : Optional ✗ : Without

EV Charger for Smart Home and Commercial

OCPP Version

Wallbox Models	BCPM-B2N-P	BCPM-BT2N-P
		
Maximum Power	7.4kW	22kW
Input Voltage /Output voltage	AC230 1-Phase	AC400 3-Phase
Input Frequency	50/60Hz	
Tethered/Socket	Socket	
Meter	Metering Chip	
Display	LED Lights	
RFID	✓	✓
DLB	○	○
Wi-Fi	✓	✓
Ethernet	✓	✓
Bluetooth	✓	✓
4G	○	○
Over Voltage &Under Voltage Protection	✓	✓
Emergency Stop	✓	✓
Over Current Protection	✓	✓
CP Signal Short Circuit Protection	✓	✓
Over Temperature Protection	✓	✓
Lightning Protection	✓	✓
Contactor Adhesion Protection	✓	✓
Protection Degree	IP65	
Environment Temperature	-25℃~+50℃	
Maximun Altitude	< 2000m	

✓ : Standard ○ : Optional

© 2023 BENY NEW ENERGY



Wall-mounted DC EV Charging Station

Parameter

Models	BBDC-20	BBDC-30	BBDC-40
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	450*250*850(L*W*T)		
Weight	≤65kG		
Installation Method	Wall-mounted		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Single (CCS1/CCS2/GBT)		
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤15wh		
Rated Power	20KW	30KW	40KW
Output Voltage Range	CCS1/CCS2/GBT: 150 Vdc –1000 Vdc		
Output Current	0~66.7A	0~100A	0~133A
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		



Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection

© 2023 BENY NEW ENERGY



BDC Series DC EV Charging Station

Parameter

Models	BDC30-S	BDC40-S	BDC60-S
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤450kG		
Installation Method	Floor-Stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Single (CCS1/CCS2/GBT/CHADEMO)		
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24wh		
Rated Power	30kW	40kW	60kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc~1000Vdc; CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT: 0~250A; CHADEMO: 0~125A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021；IEC 61000-6-2:2019；EN61000-6-4:2019；IEC 61851-1:2019；EN 61851-23:2014；EN 61851-24:2014		

BDC Series DC EV Charging Station

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection



Parameter

Models	BDC90-S	BDC120-S	BDC150-S
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤450kG		
Installation Method	Floor-Stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Single (CCS1/CCS2/GBT/CHADEMO)		
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24wh		
Rated Power	90kW	120kW	150kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc ～1000Vdc；CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT: 0～250A；CHADEMO: 0～125A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021；IEC 61000-6-2:2019；EN61000-6-4:2019；IEC 61851-1:2019；EN 61851-23:2014；EN 61851-24:2014		

BDC Series DC EV Charging Station

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection



Parameter

Models	BDC180-S	BDC240-S
		
Structure Description		
Shell Material	Sheet Meal	
Dimension	800*800*1800(L*W*T)	
Weight	≤450kG	
Installation Method	Floor-Stand Type	
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring	
Cable Length	5 M	
Charging Outlets	Single (CCS1/CCS2/GBT/CHADEMO)	
Connectivity Authorization	RFID, App	
Screen	9.1 Inch LCD Screen/LED Light	
Electrical Specification		
AC Input Voltage	AC380V±15% ,3P+N+PEAC	
Input Frequency	50Hz/60Hz	
Consumption	≤24wh	
Rated Power	180kW	240kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc ~ 1000Vdc ~ CHADEMO: 150Vdc –500Vdc	
Output Current	CCS1/CCS2/GBT: 0~250A; CHADEMO: 0~125A	
Efficiency	≥95%	
Power Factor	≥0.99(load:100%)	
Functionate Design		
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen	
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014	

BDC Series DC EV Charging Station

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection



© 2023 BENY NEW ENERGY

BDC Series DC EV Charging Station



Parameter

Models	BDC60-D	BDC90-D	BDC120-D
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤500kG		
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Double(CCS1+CCS1) Double (CCS1+CHADEMO) Double(CCS2+GBT) Double(CHADEMO+CHADEMO)	Double(CCS2+CCS2) Double (CCS2+CHADEMO) Double(CHADEMO+GBT)	Double(CCS1+CCS2) Double(CCS1+GBT) Double(GBT+GBT)
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	60kW	90kW	120kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0~125A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection

BDC Series DC EV Charging Station



Parameter

Models	BDC150-D	BDC180-D	BDC240-D
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤500kG		
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Double(CCS1+CCS1) Double (CCS1+CHADEMO) Double(CCS2+GBT) Double(CHADEMO+CHADEMO)	Double(CCS2+CCS2) Double (CCS2+CHADEMO) Double(CHADEMO+GBT)	Double(CCS1+CCS2) Double(CCS1+GBT) Double(GBT+GBT)
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	150kW	180kW	240kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0~125A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection





Parameter

Models	BADC52-S	BADC82-S	BADC112-S
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤500kG		
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Double(CCS2+AC) Double(CHADEMO+AC) Double(CCS1+AC) Double(GBT+AC)		
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	52kW	82kW	112kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0~125A;AC:0-32A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		

BADC Series DC EV Charging Station



Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection

Parameter

Models	BADC142-S	BADC172-S	BADC202-S
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤500kG		
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Double(CCS2+AC) Double(CHADEMO+AC) Double(CCS1+AC) Double(GBT+AC)		
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	142kW	172kW	202kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0~125A;AC:0-32A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		

BADC Series DC EV Charging Station



Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection

Parameter

Models	BADC262-S
	
Structure Description	
Shell Material	Sheet Meal
Dimension	800*800*1800(L*W*T)
Weight	≤500kG
Installation Method	Floor-stand Type
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring
Cable Length	5 M
Charging Outlets	Double(CCS2+AC) Double(CHADEMO+AC) Double(CCS1+AC) Double(GBT+AC)
Connectivity Authorization	RFID, App
Screen	9.1 Inch LCD Screen/LED Light
Electrical Specification	
AC Input Voltage	AC380V±15% ,3P+N+PEAC
Input Frequency	50Hz/60Hz
Consumption	≤24W
Rated Power	262kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0~125A;AC:0-32A
Efficiency	≥95%
Power Factor	≥0.99(load:100%)
Functionate Design	
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014

BADC Series DC EV Charging Station

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection



© 2023 BENY NEW ENERGY

BADC Series DC EV Charging Station



Parameter

Models	BADC82-D	BADC112-D	BADC142-D
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤500kG		
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Triple(CCS2+CCS2+AC) Triple(CCS1+GBT+AC) Triple(CCS1+CHADEMO+AC) Triple(CHADEMO+CHADEMO+AC)	Triple(CCS1+CCS1+AC) Triple(CCS2+GBT+AC) Triple(CCS2+CHADEMO+AC)	Triple(CCS2+CCS1+AC) Triple(CHADEMO+GBT+AC) Triple(GBT+GBT+AC)
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	82kW	112kW	142kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0～125A;AC:0-32A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection

BADC Series DC EV Charging Station



Parameter

Models	BADC172-D	BADC202-D	BADC262-D
			
Structure Description			
Shell Material	Sheet Meal		
Dimension	800*800*1800(L*W*T)		
Weight	≤500kG		
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring,Up Outlet Wiring		
Cable Length	5 M		
Charging Outlets	Triple(CCS2+CCS2+AC) Triple(CCS1+GBT+AC) Triple(CCS1+CHADEMO+AC) Triple(CHADEMO+CHADEMO+AC)	Triple(CCS1+CCS1+AC) Triple(CCS2+GBT+AC) Triple(CCS2+CHADEMO+AC)	Triple(CCS2+CCS1+AC) Triple(CHADEMO+GBT+AC) Triple(GBT+GBT+AC)
Connectivity Authorization	RFID, App		
Screen	9.1 Inch LCD Screen/LED Light		
Electrical Specification			
AC Input Voltage	AC380V±15% ,3P+N+PEAC		
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	172kW	202kW	262kW
Output Voltage Range	CCS1/CCS2/GBT: 150Vdc –1000Vdc;CHADEMO: 150Vdc –500Vdc		
Output Current	CCS1/CCS2/GBT:0~250A;CHADEMO:0～125A;AC:0-32A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		
Functionate Design			
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen		
Charging Stands	IEC 61851-21-2:2021; IEC 61000-6-2:2019; EN61000-6-4:2019; IEC 61851-1:2019; EN 61851-23:2014; EN 61851-24:2014		

Parameter

Communiction	
OCPP	OCPP 1.6
Network Interface	Ethernet/4G
Environment Condition	
Application Place	Indoor/Outdoor
Working Latitude	<2000m
Working Temperature	-30℃~+55℃
Working Humidity	5%~95%
Protection Level	IP55
Natural Cooling	Forced-air Cooling
MTBF	24 Months Warranty
Security Design	Over/Under Voltage Protection,Overlord Protection,Current Leakage Protection, Grounding Protection,Over Temp Protection,Lightening Surge Protection



BENY OCPP Platform Overview

Protection Functions

Remote start/stop charging

Start or stop the charging process with relative ease, even if the user is not beside the vehicle or chargers.

Time Setting Charging

Users can schedule when to use the EV chargers, ensuring they don't miss out on precious charging times.

Electricity Measurement and Reporting

Through the app, users can receive a detailed report showing the charge level, energy consumed during charging, and other important information.

Firmware Upgrade

Our EV chargers regularly receive firmware upgrades, keeping the units in optimal condition for efficient charging.

Diagnostic file upload

Users will receive a notification and a diagnostic file showing errors when a fault occurs during the charging process.

Card Number Identification and Management

If the user disconnects from the Wi-Fi, the EV chargers can still perform offline charging, and users can send charging data after the process.

Load balancing based on charging schedule

The EV chargers are installed with an innovative AI system that artificially configures the charging parameters for the vehicle based on historical data.

BENY OCPP Platform Overview

BENY OCPP

BENY OCPP is a cloud platform based on OCPP 1.6J that gathers data from a specific set of EV chargers and helps you create and manage your own charging network. Therefore, monitoring, controlling the chargers remotely and/or reporting processes is simpler and automatic.



© 2023 BENY NEW ENERGY