


BB1-63

PV Miniature Circuit Breakers

Welcome to our website for more information
www.zjbenydc.com

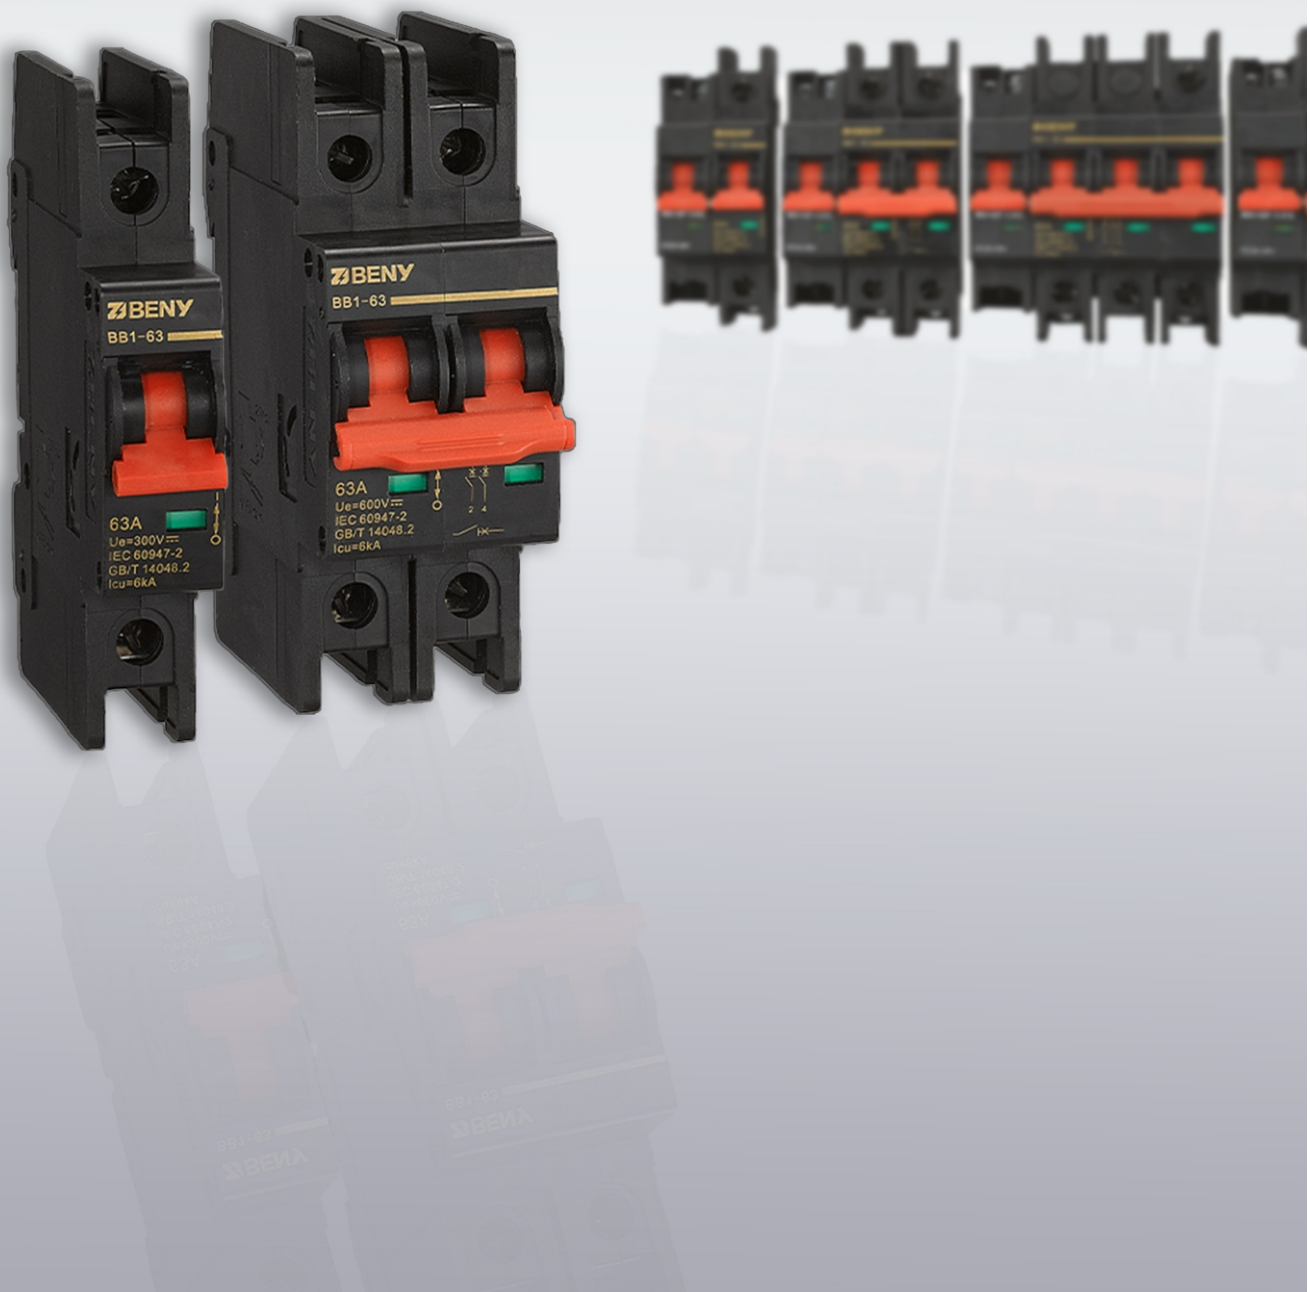

BB1-63

PV Miniature Circuit Breakers



SAA-151113-EA




- 1 Brand
- 2 Type
- 3 Rated Current
- 4 Rated Voltage
- 5 Standard Code
- 6 Indicator
- 7 Wiring Diagram

Application


ZIBENY BB1 Series PV Mini Circuit Breakers are mainly applied to DC solar combiner box ,Controller etc. The main function include overload protection ,Anti-reflux protection and short-circuit protection. Scientific design of arc-extinguishing system keep solar system more safe. Max Voltage up to 1200V DC, current up to 63A.

Appearance Introduction

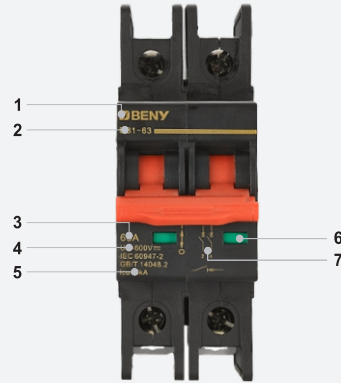

Type Instruction



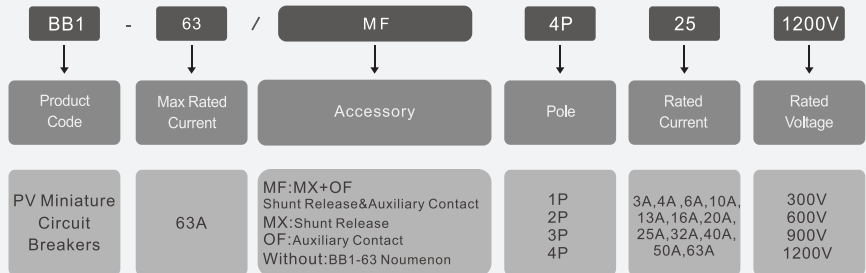








- Nonpolarity
- High Short-Circuit / Breaking Capacity
- Functions: Overload, Short Circuit, Unfrequent Operation and, Anti-reflux Protection
- Rated Voltage: 1200V, Ultimate
- Breaking Capacity : 6kA
- Rated Current: 63A
- Comply with : IEC 60947-2/GB/T 14048.2



Parameter

Electrical Characteristics		BB1-63			
Type		BB1-63			
Comply with		IEC 60947-2/GB/T 14048.2			
Pole		1P	2P	3P	4P
Rated Working Voltage	Ue	300V DC	600V DC	900V DC	1200V DC
Max Rated Current		63A			
Rated Current	In	3A, 4A, 6A, 10A, 13A, 16A, 20A, 25A, 32A, 40A, 50A, 63A			
Rated Insulated Voltage	Ui	1200V DC			
Rated Impulsed Voltage	Uimp	6kV			
Ultimate Breaking Capacity	Icu	6kA			
Run Breaking Capacity	Ics	6kA			
Tripping Type		Thermal Magnetic Type			
Service Life/cycle Operation					
Mechanical	Actual Value	20000			
	Standard Value	8500			
Electrical	Actual Value	1000			
	Standard Value	300			
Installation Environment					
Ingress Protection		All Sides IP40 ,Connection Terminal IP20			
Terminal Cross Section		2.5-25mm ²			
Working Temperature		-25°C ~ +70°C			
Storage Temperature		-40°C ~ +85°C			
Resistance to Humidity And Heat		II (when temperature arrived to 55°C,Relative Humidity95%)			
Resistance to Shock		2.6 IEC60068			
Resistance to Impact		2.27 IEC60068			



Wiring Method

Pole	1P		2P		3P		4P	
Type								
Contacts Wiring graph	1A	2A	2B	3A	3B	4A	4B	
								


Characteristic Curve

Dimensions(mm)

B curve : (4.4-6.6) In

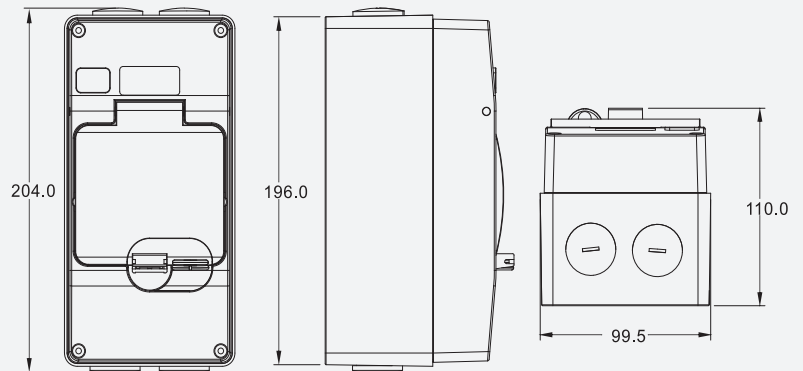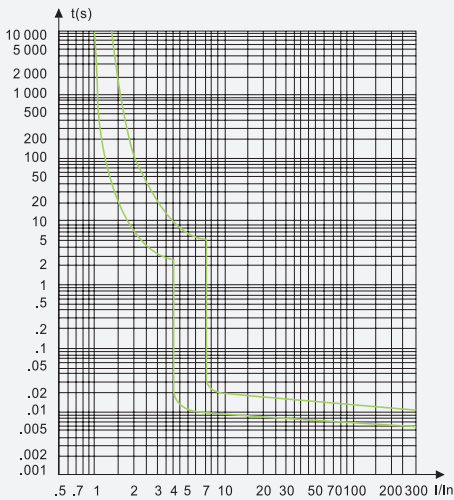

Dimensions(mm)

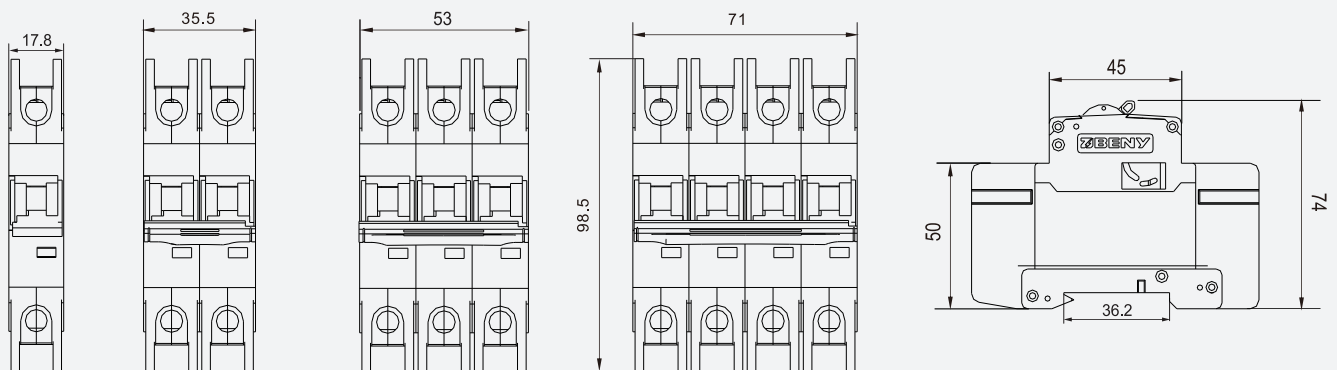


Auxiliary contact for BB1-63

Auxiliary contact unit must be mounted from the left to the device or to the release unit(s) when installed. Contact units are equipped with changeover (CO) combination(s) of contacts.

Type Instruction

- Auxiliary contact synchronous with main contacts of device
- According to IEC/EN 62019



Auxiliary contact

Electrical parameters


Contacts	BY-OF	
Contact function	2 changeover	
Tested according to	auxiliary contact	
	IEC/EN 62019	
Rated op. voltage	AC12	Ie=3A Ue=380/415V
	DC 12	Ie=1A Ue=110/125V
Min. op. current per contact I _{min}	10 mA	
Min. op. voltage per contact U _{min}	11V DC	
Rated frequency	50/60 Hz	

Mechanical parameters

Mounting	easy fastening onto 35 mm device rail	
Degree of protection	(DIN)IP20	
Terminals	lift	
Terminal capacity	≤1mm ²	
Fastening torque of terminals	0.8 — 1 N·m	
Working temperature	- 35 ~ + 70 C	




Dimensions(mm) (With Auxiliary Contact)

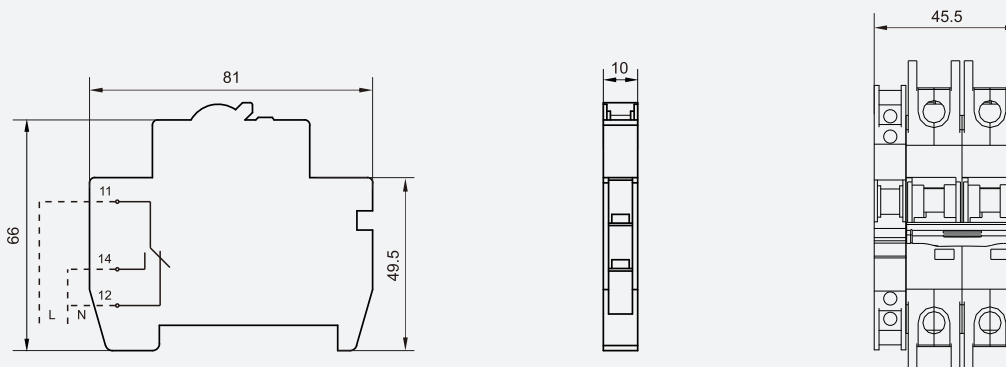

Shunt Release for BB1-63

- Shunt Release for installation devices BB1-63
- Shunt release
- According to IEC/EN 62019

Type Instruction



Shunt release

Electrical parameters


		BY-MX
Contacts		1 changeover (CO)
Contact function		Shunt release
Tested according to		IEC/EN 60947-5-1
Rated op. voltage	AC	le=2A Ue=220/415V
	DC	le=2A Ue=24/48V
Min. op. voltage		Ue*75%
Max. op. voltage		Ue*110%
Starting current		1 A
Rated frequency		50/60 Hz

Mechanical parameters

Mounting		easy fastening onto 35 mm device rail
Degree of protection		(DIN) IP20
Terminals		lift
Terminal capacity		≤1mm ²
Fastening torque of terminals		0.8 — 1 N·m
Working temperature		- 35 ~ + 70 C




Dimensions(mm) (With Shunt Release)

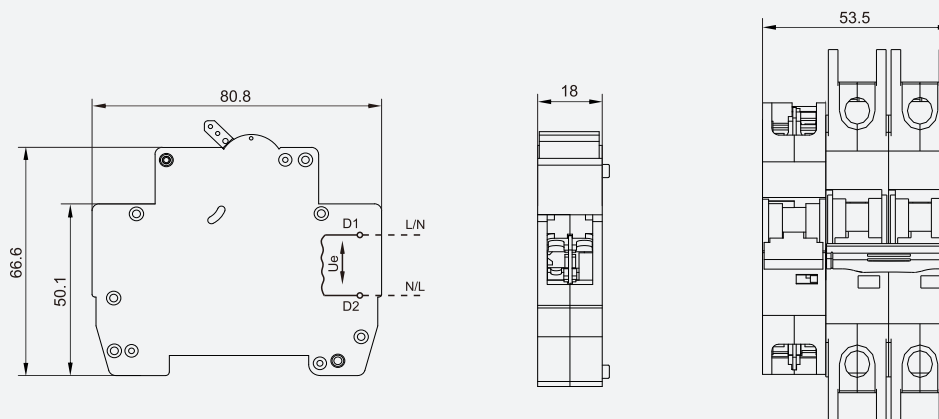

Shunt Release and Auxiliary contact for BB1-63

- Shunt Release and Auxiliary contact for installation devices BB1-63
- Shunt release and Auxiliary contact

Type Instruction



BY-MF

Electrical parameters

		BY-MF	
Contacts	2 changeover (CO)		
Contact function	Shunt Release & Auxiliary Contact		
Rated op. voltage	Shunt release	AC	$I_e=2A$ $U_e=220/415V$ $I_e=2A$ $U_e=24/48V$
		DC	$I_e=2A$ $U_e=24/48V$
	Auxiliary contact	AC	$I_e=3A$ $U_e=220/415V$
		DC	
Rated frequency	50/60 Hz		

Mechanical parameters

Mounting	easy fastening onto 35 mm device rail
Degree of protection	(DIN) IP20
Terminals	lift
Terminal capacity	$\leq 1mm^2$
Fastening torque of terminals	0.8 — 1 N·m
Working temperature	- 35 ~ + 70



Dimensions(mm)(With Shunt Release & Auxiliary Contact)

